

M7228 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE OUTPUT
- UP TO 200W
- DC/DC CONVERTER

M7228 SERIES DC/DC POWER SUPPLY

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

Special Features

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Remote sense
- External On/Off Inhibit
- Parallel connection with current share
- Redundancy connection
- Fixed switching frequency (250 kHz)
- External synchronization capability
- EMI/RFI filters included
- External output modification
- Indefinite short circuit protection with auto-recovery
- Over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

Electrical Specifications

DC Input:

DC Input range: 18 to 48 VDC,
per MIL-STD-704E.

No damage for:

MIL-STD-1275A (100V for 50mSec)

MIL-STD-704A (80V for 0.1 Sec)

DC Output:

Output range – 2V to 15V

Output current – max 50A

Isolation:

200V between Input and Output

200V between Input and Case

100V between Output and Case

Line/Load regulation:

Less than 1% (no load to full load,
–55°C to +85°C).

Efficiency:

Typical 80-88% - (full load,
room temperature)

EMI/RFI:

Design to meet* MIL-STD-461F
CE101, CE102, CS101, CS114,
CS115, CS116, RE101, RE102,
RS101, RS103

Ripple and Noise:

Less than 50mVp-p, typical (max. 1%)
without external capacitance. When
connected to system capacitance ripple
drops significantly.

Load Transient Overshoot and undershoot

Output resistance at load change of
50%-100% is 30-70 mΩ (depending on
output voltage). Output back to steady
stated within 300-500μSec

Turn on Transient

No voltage over shoot during power
on.

M7228 SERIES DC/DC POWER SUPPLY

Protections *

Input

- **Inrush Current Limiter** – peak value of $5 \times I_{in}$ for less than $50\mu\text{Sec}$.
- **Under voltage protection** – unit protects itself (no damage) below 16.5Vdc.
- **Over voltage protection** – unit protects itself (no damage) above 52Vdc

Output

- **Electronic over voltage protection** – Internal control protects unit (no damage) 10% above nominal voltage.
- **Passive transorb on outputs** – 20% above nominal voltage.
- **Current limiting** – Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

General

- Over temperature protection: Shutdown at base plate temperature of $+105^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$) Automatic recovery at base plate temperature lower than $+95^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Environmental (Design to meet MIL-STD-810F)

Temperature:

Operating: -55°C to $+85^{\circ}\text{C}$
(base plate)

Storage: -55°C to $+125^{\circ}\text{C}$

Humidity:

Method 507.4 - Up to 95%.

Altitude:

Method 500.4, Procedure I & II,
40,000 ft. and 70,000 ft. Operational

Vibration and Shock:

Shock - Saw-tooth, 20g peak, 11mS.
Vibration - Figure 514.5C-17.
General minimum integrity exposure.
(1 hour per axis)

Salt Fog:

Method 509-4

Reliability

150,000 hours, calculated per
MIL-STD-217F at $+85^{\circ}\text{C}$ base plate,
Ground fixed.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

Pin Assignments

Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function
1	PAR OUT	11	+OUT	21	PAR IN	31	+OUT
2	-SIGNAL OUT RTN	12	+OUT	22	- OUT	32	NC.
3	-SENSE	13	+OUT	23	-OUT	33	+SENSE
4	- OUT	14	SYN IN	24	- OUT	34	INHIBIT
5	- OUT	15	SYN OUT	25	- OUT	35	+VIN
6	-OUT	16	-SIGNAL IN RTN	26	- OUT	36	+VIN
7	- OUT	17	+VIN	27	+OUT	37	- VIN
8	-OUT	18	- VIN	28	+OUT		
9	+OUT	19	- VIN	29	+OUT		
10	+OUT	20	VCAL OUT	30	+OUT		

* All output parallel pins should be connected together for best performance.

M7228 SERIES DC/DC POWER SUPPLY

Functions and Signals

INHIBIT signal

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.) TTL “0” – will turn off the power supply.

SENSE

The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals).

The use of remote sense has a limit of voltage dropout between converter’s output and load terminals of 2 – 10% of voltage output.

When not used connect +SENSE to +OUT and –SENSE to –OUT.

SYN IN signal

The SYN IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250Khz $\pm$ 10Khz TTL level.

When not connected the power supply will work at 250kHz.

SYN OUT signal

The SYNC OUT signal is used to sync the system with the power supply frequency.

PAR IN signal

The PAR IN signal is used to connect the power supply in parallel to other power supplies and have them divide equally the power between one another. All the power supplies should connect PAR IN signals together except the master unit where the PAR OUT signal connects to all the PAR IN signals.

PAR OUT signal

The PAR OUT signal is used to connect the power supply in parallel to other power supplies and have them divide equally the power between one another. The master unit connects the PAR OUT signals to all PAR IN pins of the slave units.

-SIGNAL IN RTN

The –SIGNAL IN is referred to the input ground.

This Pin is used as grounding for INHIBIT, SYN IN, SYN OUT signals.

-SIGNAL OUT RTN

The –OUT SIGNAL is referred to the output ground.


This Pin is used as grounding for PAR IN, PAR OUT and V/CAL OUT signal.

V/CAL OUT

The OUT V/CAL signal is used to control and adjust the output power of the power supply within the given tolerances.


M7228 SERIES DC/DC POWER SUPPLY

Typical Connection

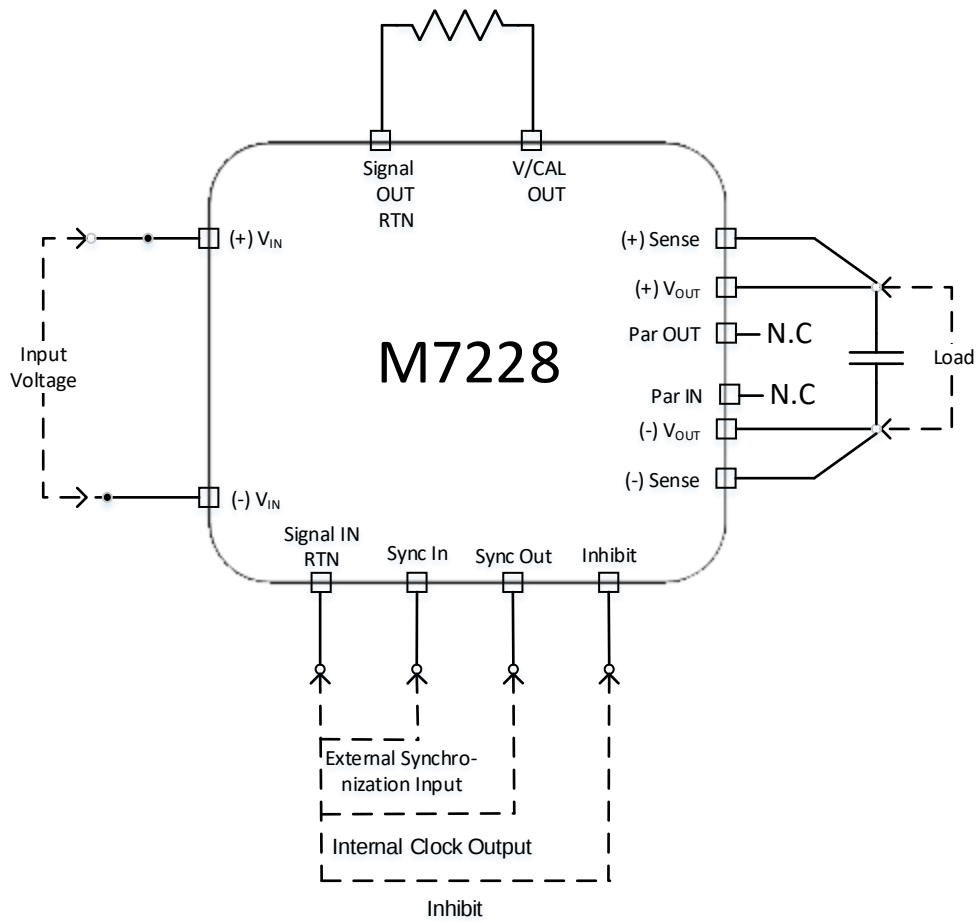


M7228 SERIES DC/DC POWER SUPPLY

Parallel connection with current share

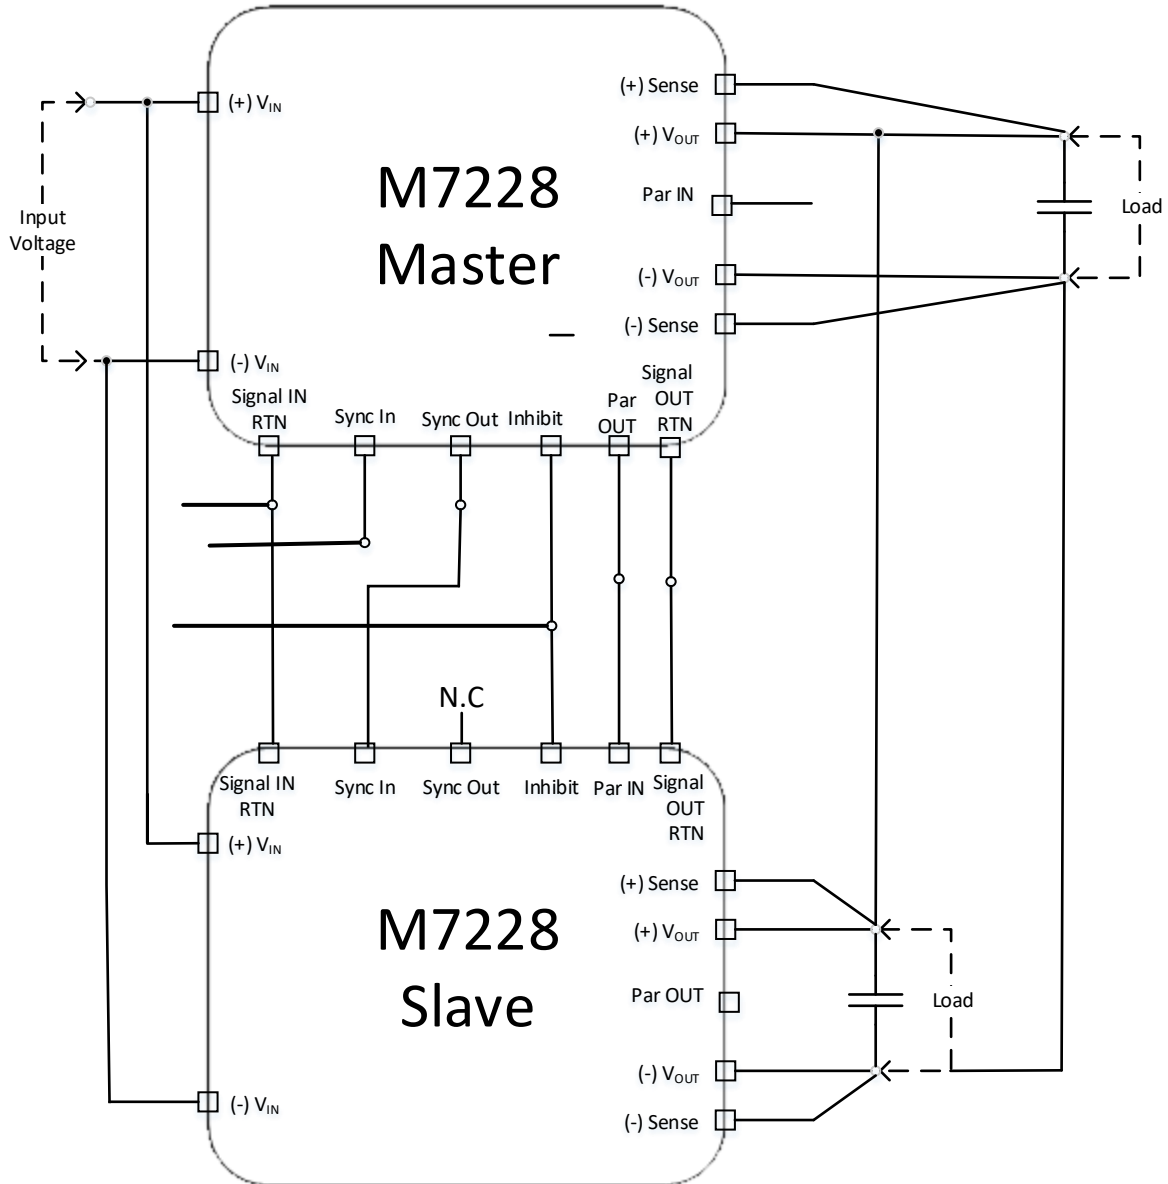


M7228 SERIES DC/DC POWER SUPPLY

Outline Drawing

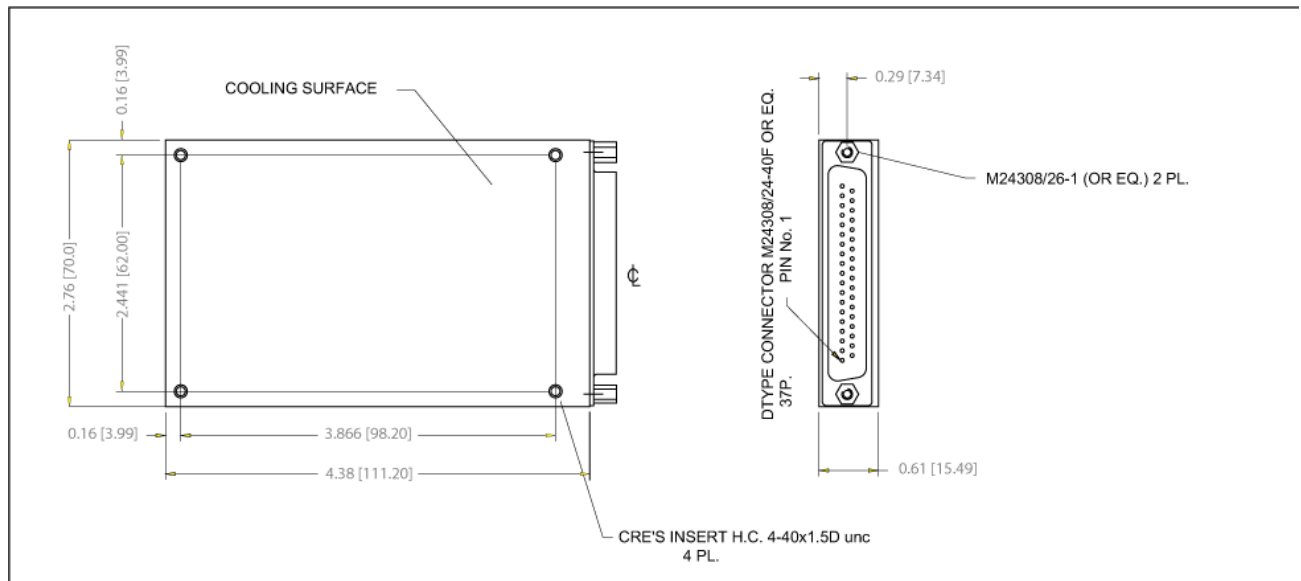

Heat Dissipation Surface

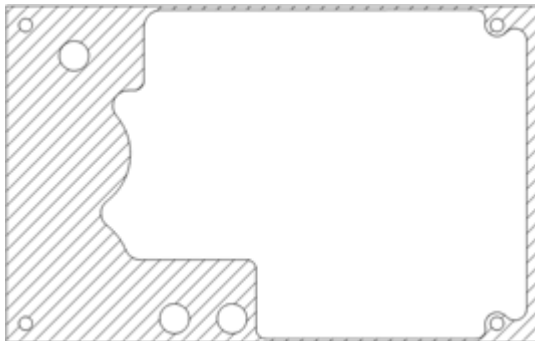

Dissipation Area
3.876 in²
(2501mm²)

Notes

1. Dimensions are in Inches [mm]
2. Tolerance is:
.XX ±.02 IN
.XXX ±.01 IN
3. Weight: Approx. 265g (9.2 oz)
4. Mounting holes can be modified – please consult factory.
5. Parasolid 3D module is available for download on site.

* Specifications are subject to change without prior notice by the manufacturer